
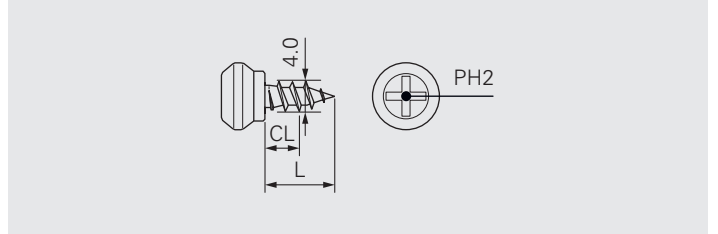


SPK-4.0xL

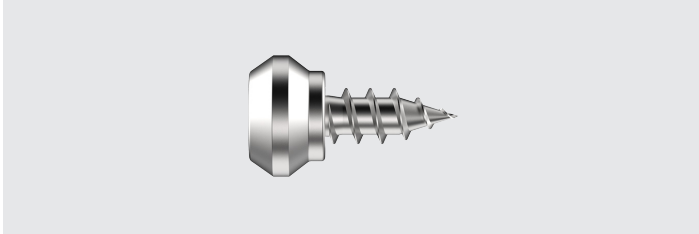

Application

Fastening for clip-on profiles.

Guidelines for processing


Speed under load min 400-600 rpm

Axial force 300 N


Magazined fasteners are processed with the CF35 tool.

Material	Coating	Design
Carbon steel	GS: Chrome (VI)-free 480 h salt spray test without red rust	Adapted to suit the PVC-u profile Cross recess PH2


Essential characteristics



Tensile breaking load $Z_{b,k}$
3.59 kN



Shear breaking load $Q_{b,k}$
2.36 kN



Torsional breaking $M_{t,k}$
2.14 Nm

Calculation formula for F_{Rk} according to EN 1993-1-3 table A2 with γ_{M2} for $n=10$