


SPT-S-4.3xL

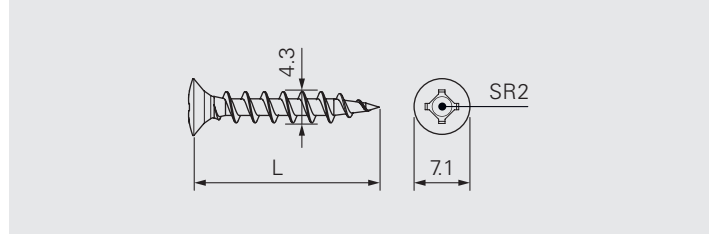

Application

Fastening of hardware to unreinforced PVC-u.

Guidelines for processing


Speed under load 400–600 rpm

Axial load 300 N


Processing with cross slot form H possible

Material	Coating	Design
Stainless steel A2	–	SR recess–stick-fit, wobble free


Essential characteristics



Tensile breaking load $Z_{b,k}$
3.17 kN



Shear breaking load $Q_{b,k}$
2.71 kN



Torsional breaking $M_{t,k}$
2.18 Nm

Calculation formula for F_{Rk} according to EN 1993-1-3 table A2 with $\alpha = 1.92$ for $n=10$