
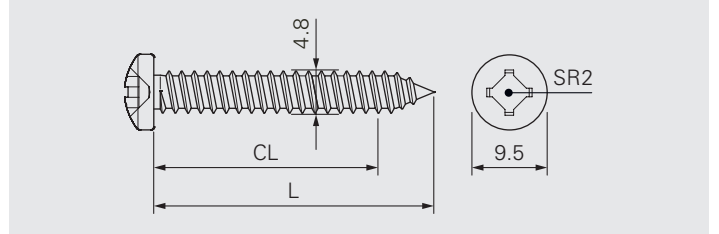


VAT-S-7049-4.8xL

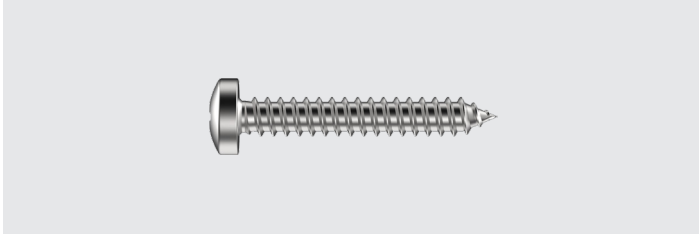

Application


Self-drilling screw for aluminium window frames.

Guidelines for processing


–

Material	Coating	Design
Stainless steel A2	–	Selfdrilling fastener with SR2 recess


Essential characteristics



Tensile breaking load $Z_{b,k}$
7.09 kN



Shear breaking load $Q_{b,k}$
5.54 kN



Torsional breaking $M_{t,k}$
5.66 Nm

Calculation formula for F_{Rk} according to EN 1993-1-3 table A2 with γ_{M2} for $n=10$